

# JET-RS


## Porte rapide à enroulement auto-réparable



The JET-RS self-repairing high-speed roll-up flexible door is primarily characterized by the automatic repositioning of the curtain within the vertical guides. It features a frequency converter for speed regulation, quick-connect terminals, and electronic limit switches for simple and efficient installation. Anti-pinch and safety cells, as well as IP67 light curtains, are included as standard equipment. The opening speed can reach 2.5 m/s.

Optional:  
 Full-width transparent sections (maximum visibility, natural light, enhanced safety)  
 AISI 304 or 316 stainless steel version (maximum resistance, even in demanding environments)  
 Customization: silk-screening and logos directly integrated on the curtain

### Layout drawing

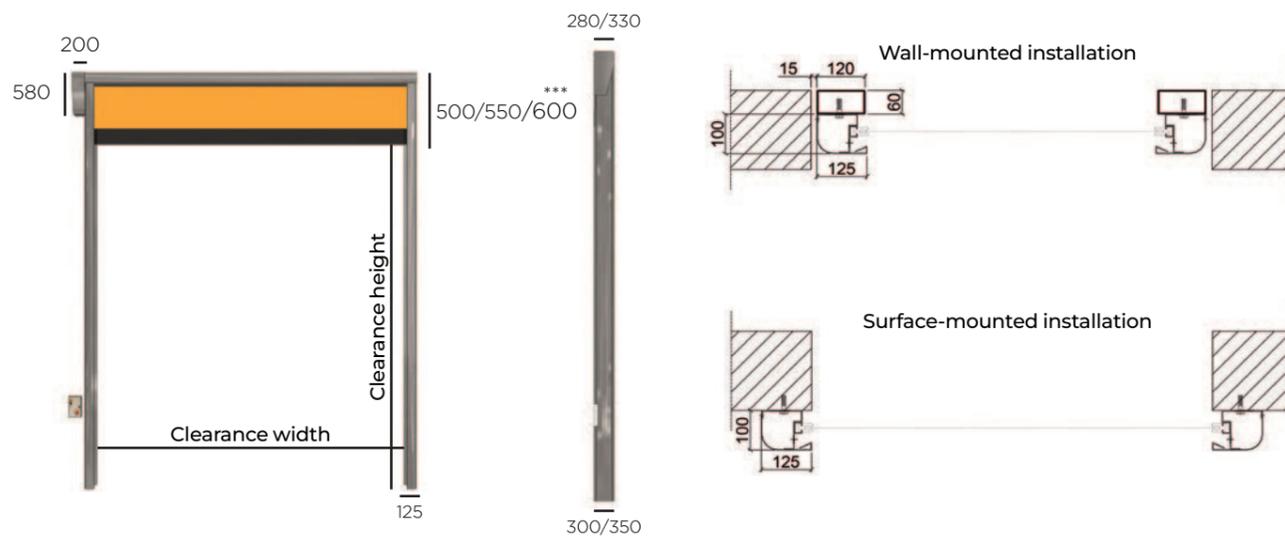

### Certification

• CE certified according to standard NF EN 13241+A2

### Standard curtain colors

- RAL 9016 • RAL 1013 • RAL 5015 • RAL 5010 • RAL 1003
- RAL 2004 • RAL 7035 • RAL 7038 • RAL 7037 • RAL 7016
- RAL 6026 • RAL 3000 • RAL 9005 • RAL 9006

<b>Application field</b>	Indoor / Outdoor	
<b>Maximum dimensions</b>	7000W x 5600H mm	Clearance, Width x Height
<b>Wind resistance class</b>	2000W x 5600 H mm 5000W x 5600 H mm 6000W x 5600 H mm 7000W x 5600 H mm	Class 4 Class 3 - Up to Class 4** Class 2 - Up to Class 4** Class 1
<b>Operating speed</b>	Opening / Closing	Up to 2,5 m/s   0,8 m/s, adjustable
<b>Operating temperature</b>	From -30 °C to +70 °C Maximum temperature variation : ±40 °C	Up to 2,5 m/s   0,8 m/s, adjustable
<b>Structure</b>	Galvanized steel Powder-coated steel AISI 304	Standard Optionnal
<b>Winding shaft</b>	Galvanized steel Powder-coated steel AISI 304	Standard Optionnel
<b>Control panel</b>	Metallic, powder-coated, IP55 AISI 304/316 stainless steel, IP66 PVC IP66	Standard Optionnal Optionnal
<b>Motor position</b>	Front left / right Side left / right	Standard Standard
<b>Curtain</b> Polyvinyl Chloride (PVC) Self-repairing	<b>Standard</b> 900 g/m <sup>2</sup>   Thickness: 0.9 mm U = 5,7 W/m <sup>2</sup> K <b>Insulated</b> 1300 g/m <sup>2</sup>   Thickness: 3.2 mm U = 3,9 W/m <sup>2</sup> K <b>Fire-resistant</b> 700 g/m <sup>2</sup> (B-S2-D0) <b>Simple</b> 700g/m <sup>2</sup> <b>Food-grade curtain</b> U = 5,7 W/m <sup>2</sup> K <b>Anti-static curtain</b> 1700 g/m <sup>2</sup>   Thickness: 2 mm	Standard Optionnal Optionnal Optionnal Optionnal Optionnal
<b>Windows</b>	One row of vision panels (L850xH300mm) Custom dimensions	Standard Optionnal
<b>Windows type</b>	Transparent / Mesh Mesh, with covers	Standard / Normal use For ventilation Optional / For use during cold periods
<b>Control system</b>	230 V with logic board, with frequency converter	Standard
<b>Curtain positioning</b>	Absolute encoder Mechanical limit switch	Standard Optionnal
<b>Motor</b>	Three-phase motor with automatic brake, IP55	Standard
<b>Safety devices</b>	IP67 multi-beam light curtain Flashing light Anti-jamming sensor Microwave radar	Standard Standard Optionnal Optionnal
<b>Emergency opening</b>	Emergency crank Backup battery Counterweight	Standard Optionnal Optionnal, with automatic opening